


CLA1615LBL



CLA1615L

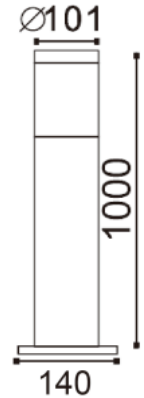


Exterior Lighting




CLA1615SBL



CLA1615S



CLAW32



PRODUCT FEATURES

- Input voltage range: 220-240V AC 50/60Hz
- Housing: powder coated 304 stainless steel
- Screws & surface mounting bracket + louvres: stainless steel (Not for use inground)
- Diffuser: clear PC
- Lamp holder: E27 (Max 60W halogen globes)
- Recommended CLA globes: 3U001-003(when used with external control gear), CAN & LT series (Limited space of OD 53mm x H 145mm available)
- Globe not included

E27	IP44 Rated	2YEAR Replacement Warranty
-----	----------------------	---

PART NO.	DESCRIPTION	DIAM (mm)	INSIDE LOUVRE OD(mm)	INSIDE LOUVRE H(mm)	HEIGHT (mm)	Mounting PLATE OD (mm)	WEIGHT (KG)	BOX (cm)	CARTON QTY
CLA1615LBL	BOLLARD ELANORA SS304 ES BLK LONG 1000mm	Ø101	Ø53	145	1000	Ø140	2.4	15x15x101	1/4
CLA1615SBL	BOLLARD ELANORA SS304 ES BLK SHORT 500mm	Ø101	Ø53	145	500	Ø140	1.3	15x15x51	1/10
CLAW32	WALL ES ELANORA S/M FIXED SS304 RND	Ø101	Ø53	145	265	Ø97	1.5	29x17x11.5	1/10
CLA1615L	BOLLARD ELANORA SS304 ES LONG 1000mm	Ø101	Ø53	145	1000	Ø140	2.0	15x15x100	1/4
CLA1615S	BOLLARD ELANORA SS304 ES SHORT 500mm	Ø101	Ø53	145	500	Ø140	1.0	15x15x51	1/10