



## RGB LED FLOOD LIGHTS

- Input voltage: 85-265V AC 50-60Hz
- Custant current driver included
- Housing: die cast aluminium
- LED chip: 30x30MIL
- Power factor: >0.9
- CRI: >70
- Flex & plug: 1200mm
- Infrared remote included (range: see below)
- Ambient temp: -35 to 35°C
- Not suitable for dimming
- Not suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

General Lighting



50,000hr Lifetime	120° Beam Angle	<b>IP65</b> Rated	<b>3YEAR</b> Replacement Warranty
----------------------	--------------------	----------------------	---



▲ CLA323610RA  
Memory mode (Will restart on selected colour - except when using fade)  
Infrared remote range up to 8m



▲ CLA323630R  
Memory mode (Will restart on selected colour - except when switched off at wall)  
Infrared remote range up to 4m

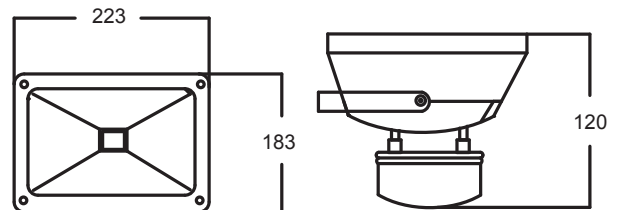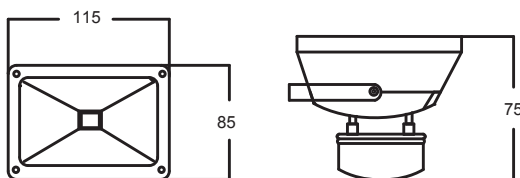

PART NO.	DESCRIPTION	LUMENS (LM)	WATT (W)	DIMENSIONS (mm)	WEIGHT (KG)	BOX (CM)	CARTON QTY
CLA323610RA	10W BLK LED FLOOD LIGHT RGB	600LM IN WHITE	10	115x85x75	0.70	14X14X10	1/18
CLA323630R	30W BLK LED FLOOD LIGHT RGB	1800LM IN WHITE	30	223x183x120	2.15	23X23X13	1/4

BROCHURE UPDATED ON 02.11.2018