Wynd
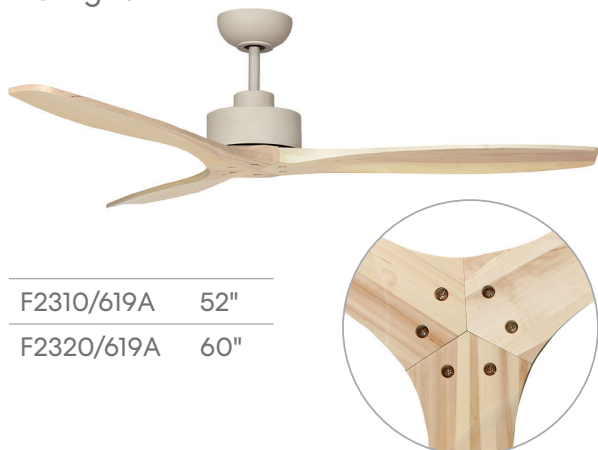## DC

Featuring FSC® 100% Certified solid timber blades & Bio-based plastic motor housing with a unique 'Ecru' colour and terrazzo texture.

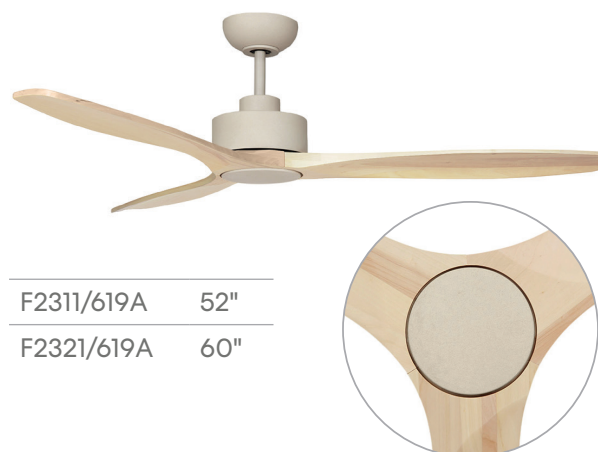### Ecru Motor / Natural Blades
No Light

F2310/619A	52"
F2320/619A	60"

With Base Cap
(Light Adaptable)

F2311/619A	52"
F2321/619A	60"

CCT LED Light
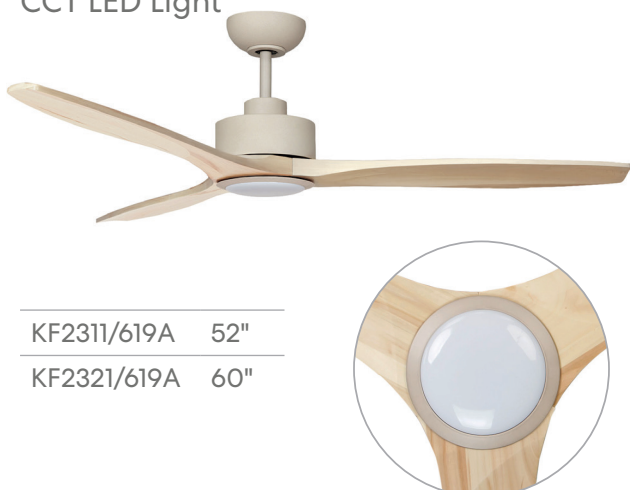
KF2311/619A	52"
KF2321/619A	60"

52" 1320mm

60" 1520mm

RECOMMENDED
CHOICE
February 2025

Technical Data

Install Location:	Indoor ONLY
Motor Type:	DC
Blade Material:	FSC® Certified Solid Timber
Reversible:	Yes
Mount Angle:	0-14˚
Blade Pitch:	12˚ (Approx)
Timer:	1, 4, 8 Hour

Remote

Supplied with remote control

Remote frequency 433 MHz

Biobased plastic
Motor Housing

FSC® Certified
Solid Timber Blades

FSC® N004533

Performance 52"

Speed	Wattage	RPM	Airflow
1	3	60	4,184
2	5	90	6,351
3	9	120	8,259
4	15	145	9,403
5	22	175	11,766
6	30	200	13,031

Performance 60"

Speed	Wattage	RPM	Airflow
1	5	60	5,928
2	8	85	7,922
3	11	110	10,334
4	17	135	12,019
5	26	160	15,565
6	38	185	17,332

About the CCT LED Light

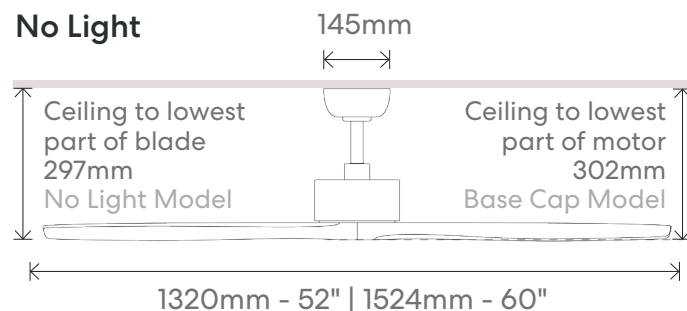| 3000k	4000k	5000k
1584 Lumens	1754 Lumens	1696 Lumens

Light Type:	LED (22w)
Dimmable:	Yes (Stepless)

FCSP13-AF003 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.
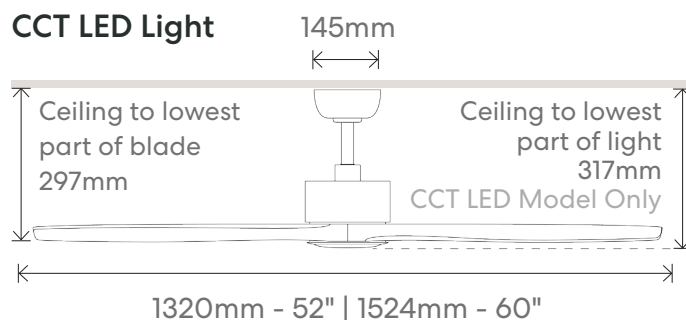
CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

No Light

145mm

Ceiling to lowest part of blade 297mm
No Light Model

Ceiling to lowest part of motor 302mm
Base Cap Model

1320mm - 52" | 1524mm - 60"

CCT LED Light

145mm

Ceiling to lowest part of blade 297mm

Ceiling to lowest part of light 317mm
CCT LED Model Only

1320mm - 52" | 1524mm - 60"

Extension Rods

Ecru

K008M/606A	600mm
KOO8M/612A	1200mm