
Infinity-iD DC 48¹¹

Scandinavian style designed combining energy efficiency, durability & functionality.

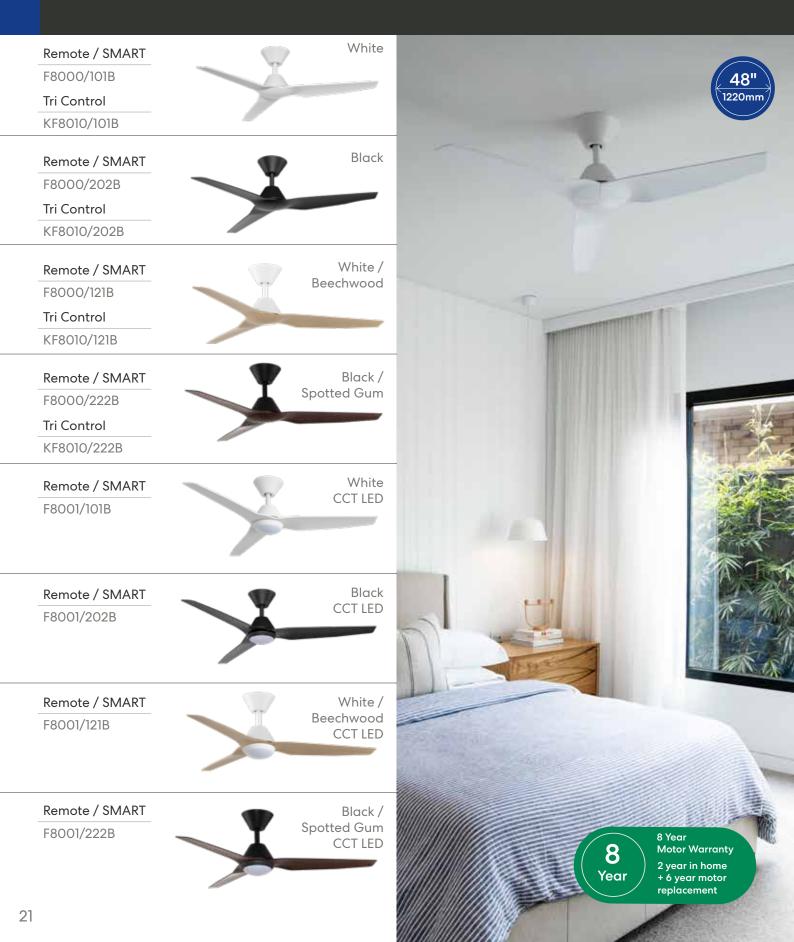

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-7°
Blade Pitch:	12° (Approx)
Timer:	1-9 Hour

Remote / SMART



Supplied with remote control & SMART functionality

Remote frequency 2.4 GHz

Tri Control

No Light Models only



Supplied with wall control & remote that work in tandem as well as SMART functionality

Performance 48"

Speed	Wattage	RPM	Airflow
1	3.2	60	3,240
2	4.2	94	4,553
3	6.1	129	5,861
4	9.1	163	7,056
5	13.5	197	8,129
6	20.2	230	9,409


About the CCT LED Light

•	•	•
3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type:	LED (18w)	
Dimmable:	Yes (Stepless)	
SP13-MK006 (White) SP13-MK007 (Black) User Replaceable LED Light		
Panel. Plug in LED panel can be		

replaced without an electrician.

CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

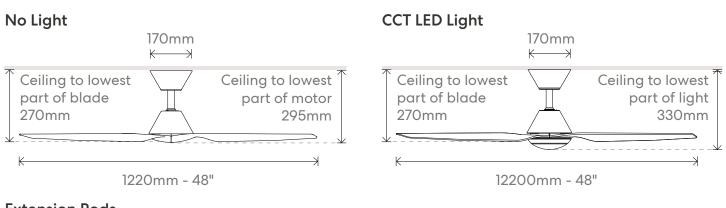


Extension Rods

White		Black	
K500M/109A	900mm	K500M/209A	900mm
K500M/115A	1500mm	K500M/215A	1500mm

Infinity-iD DC 54

Scandinavian style designed combining energy efficiency, durability & functionality.

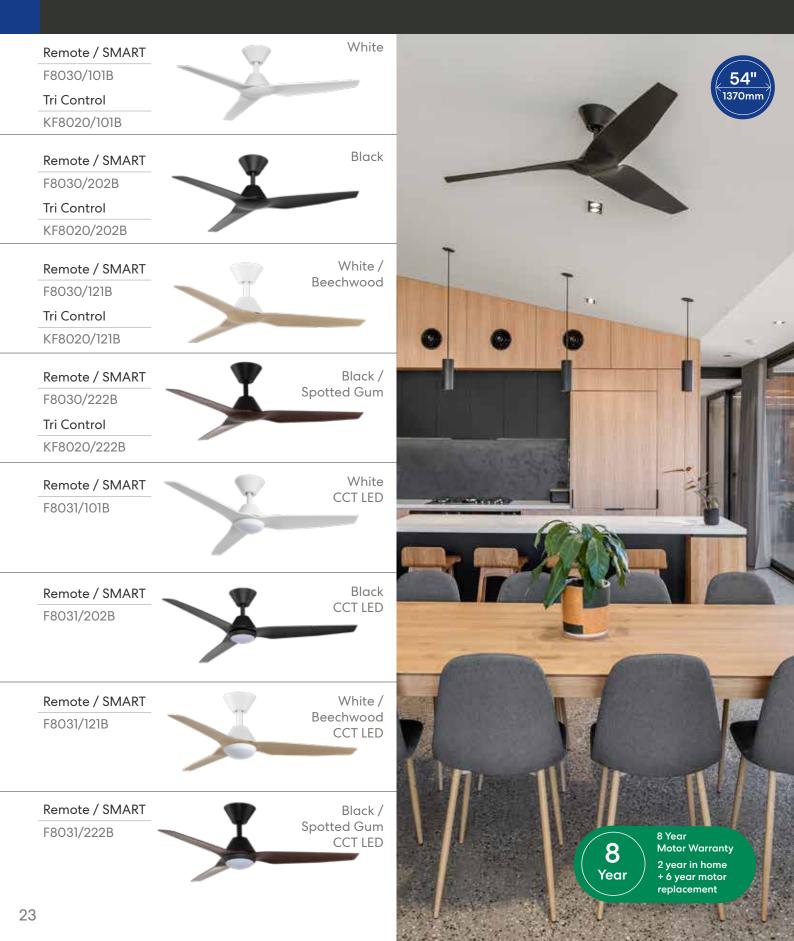

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-7°
Blade Pitch:	12° (Approx)
Timer:	1-9 Hour

Remote / SMART



Supplied with remote control & SMART functionality

Remote frequency 2.4 GHz

Tri Control

No Light Models only



Supplied with wall control & remote that work in tandem as well as SMART functionality

Performance 54"

Speed	Wattage	RPM	Airflow
1	3.4	60	3,420
2	4.6	88	4,644
3	6.8	116	6,049
4	10	145	7,020
5	15.2	174	8,641
6	22.5	200	10,081


About the CCT LED Light

•	•	•
3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type:	LED (18w)	
Dimmable:	Yes (Stepless)	
SP13-MK006 (White) SP13-MK007 (Black) User Replaceable LED Light		
Panel. Plug in LED panel		

replaced without an electrician.

CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

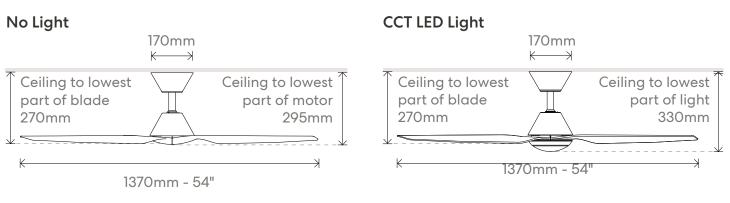


Extension Rods

White		Black	
K500M/109A	900mm	K500M/209A	900mm
K500M/115A	1500mm	K500M/215A	1500mm

Infinity-iD DC 64"

The Architecturally inspired favourite now available in a larger, 64 inch diameter option for Summer 2023/24.

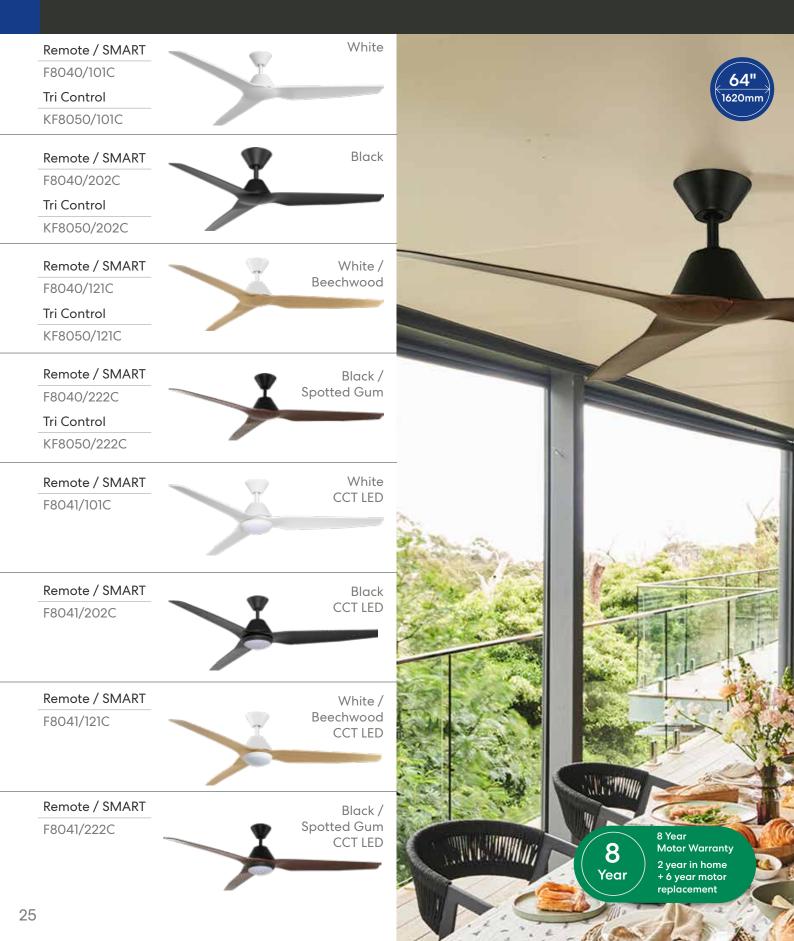

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor* & Coastal
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-7°
Blade Pitch:	12° (Approx)
Timer:	1-9 Hour

Remote / SMART



Supplied with remote control & SMART functionality

Remote frequency 2.4 GHz

Tri Control No Light Models only



Supplied with wall control & remote that work in tandem as well as SMART functionality

Performance 64"

Speed	Wattage	RPM	Airflow
1	4.6	60	6,983
2	6.4	85	8,136
3	9.6	109	9,045
4	14.1	133	10,795
5	22.3	156	11,589
6	32.5	180	13,658

About the CCT LED Light


•	•	•
3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type:	LED (18w)
Dimmable:	Yes (Stepless)
SD12 MKO12 (White) SD1	2 MKO14 (Plack)

SP13-MKO13 (White) SP13-MKO14 (Black) User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

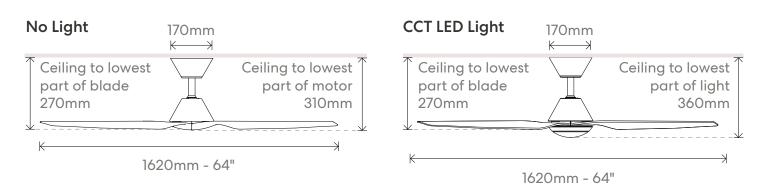

Extension Rods

White		Black	Black	
K500M/109A	900mm	K500M/209A	900mm	
K500M/115A	1500mm	K500M/215A	1500mm	