


GIROTRI (Large)

Exterior LED Surface Mounted Up/Down Wall Lights IP65

- Input voltage: 100-240V 50/60Hz
- Inbuilt Constant Current Driver included
- Housing & heatsink: aluminium
- Diffuser: clear acrylic
- Back plate: aluminium
- LED chips: 8pcs 5050
- Tri-CCT(3000/ 4000/ 6500K) in one fitting
- CCT switch inside the fitting
- CRI: >80
- Power factor: 0.9
- **2 stickers included which allow narrowing of beam angle at both or either end**
- **Beam angle: without sticker is 85° and with the sticker is 65°**
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensors

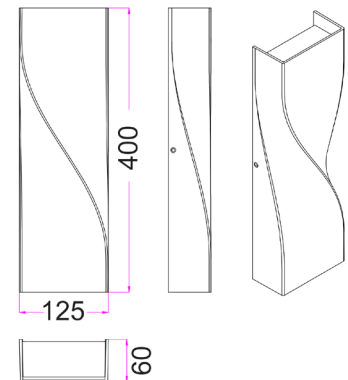

| Part No. | Description | Lumens | | | Watt | Dimensions | Box Weight | Box Dimensions | Carton Qty |
|----------|---|--------|--------|--------|------|---------------------|------------|----------------|------------|
| | | 3000K | 4000K | 6500K | | | | | |
| GIROTRI3 | WALL S/M Up/Dn 20W LED TRI TWIST Dark Grey Alt Beam | 1094lm | 1242lm | 1135lm | 20W | H400 x W125 x D60mm | 1.5kg | 14x7x41cm | 1/6 |
| GIROTRI4 | WALL S/M Up/Dn 20W LED TRI TWIST WH Alt Beam | 1094lm | 1242lm | 1135lm | 20W | H400 x W125 x D60mm | 1.5kg | 14x7x41cm | 1/6 |

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box).

*To avoid disappointment and warranty problems, please ensure the IP rating of the chosen product is relevant for the intended use.