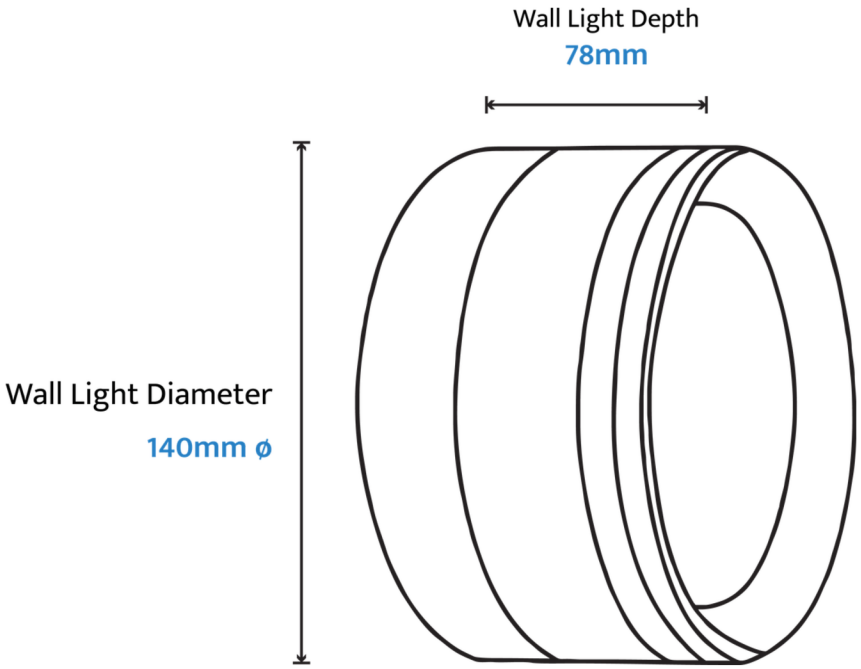


Grebe GRE-1EXR-6W Specifications


Light Source	LED | SMD2835
Colours	Black, White
Wattage	6W
Dimmable	No
Kelvins	3000K - 4000K - 6000K
Lumens	362.4lm - 412.8lm - 398.4lm
CRI	CRI≥90
LED Hour Rating	30000H | L80B50
Beam Angle	360°

Supply (Voltage)	220-240V AC~50/60Hz
Temperature Rating	-15°C~+65°C
Construction	ABS Plastic & Polycarbonate
IP Rating	IP65
Electrical Protection	Class II
Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1,AS/NZS 61347.1,AS/NZS 61347.2.13,AS/NZS CISPR 15
Recommended Use | Warranty	Domestic / Commercial | 3 Year Replacement
NZ/AU Driver | Driver Type	11A4-09182G-D00-0-230 mA | Constant C, Isolated
Net Weight | Gross Weight	0.43KG | 0.87KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations

VIEW RANGE PAGE

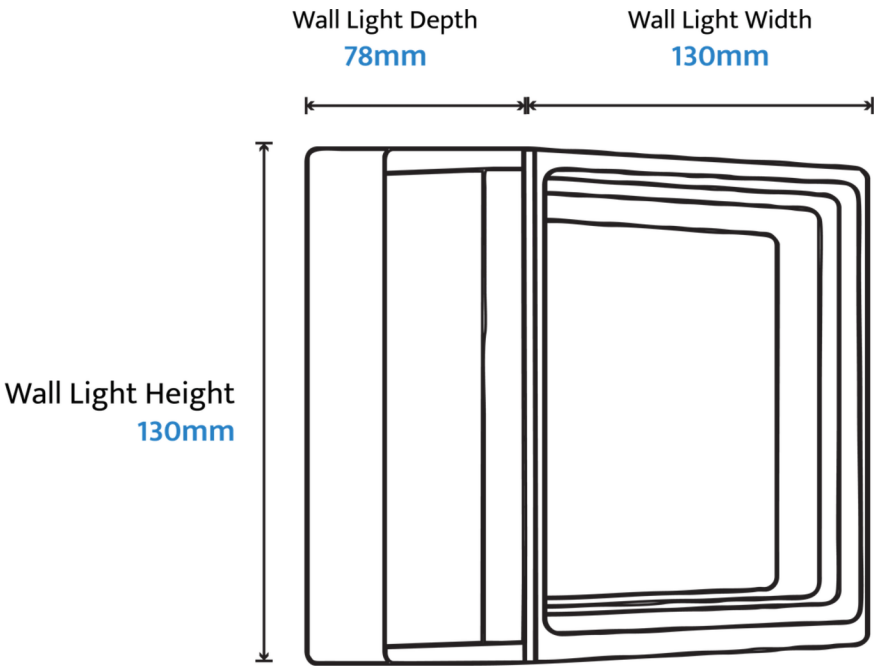

Grebe GRE-1EXS-6W Specifications

Light Source	LED | SMD2835
Colours	Black, White
Wattage	6W
Dimmable	No
Kelvins	3000K - 4000K - 6000K
Lumens	362.4lm - 412.8lm - 398.4lm
CRI	CRI≥90
LED Hour Rating	30000H | L80B50
Beam Angle	360°

Supply (Voltage)	220-240V AC~50/60Hz
Temperature Rating	-15°C~+65°C
Construction	ABS Plastic & Polycarbonate
IP Rating	IP65
Electrical Protection	Class II
Compliance	AS/NZS 60598.1, AS/NZS 60598.2.1,AS/NZS 61347.1,AS/NZS 61347.2.13,AS/NZS CISPR 15
Recommended Use | Warranty	Domestic / Commercial | 3 Year Replacement
NZ/AU Driver | Driver Type	11A4-09182G-D00-0-230 mA | Constant C, Isolated
Net Weight | Gross Weight	0.46KG | 0.9KG

All fixtures must be installed by a licensed electrician. Please also consult a licensed electrician for any electrical and wiring enquiries. For technical support please contact: customerservice@calibo.com.au

Also available in other configurations

VIEW RANGE PAGE