
Jackson Rectangle Polished Edge Mirror Includes Mirror Demister



Note: All dimensions are in millimetres (mm)

| Stock Code | S | Size (mm) | Shape | | Edge | |
|---------------|-------------|--------------|-------------|-------------|---------------|--|
| JS6075HND | 600 |) x 750 x 11 | Rectangle | | Polished Edge | |
| a \ ANDSCA p. | AN BACKING. | ock-FREE Min | JEARS WARD. | OR EASY (NO | UNES DEMIS | |



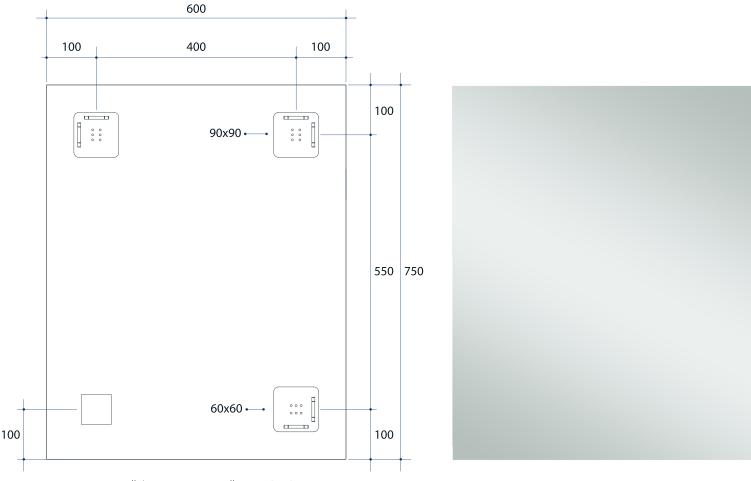









This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page

Please note: Bracket location may vary +/- 5mm. DO NOT pre-drill holes for mounts before confirming exact locations on your mirror. Measurements and diagrams are to be used as a guide only.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.





Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

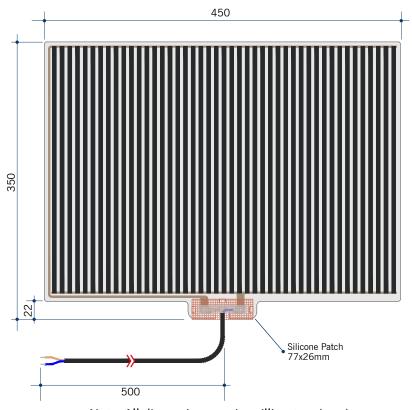



Note: All dimensions are in millimetres (mm)

| Stock Code | Size (mm) | Heat Output (W) | Voltage - Frequency |
|------------|---------------------|---|----------------------|
| TM3545 | 350 x 450 | 38 | 220 - 240V 50Hz |
| 10 | 240V | IP64 IP64 O.6MM | Some CTION THICKNESS |
| 35-40°C | FULLY SELF-ADHESILE | WIRING LEAD SOUBLE INSULATED \$500MM→ | MADE IN EUROPE |

Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.



