

# LINEAL

## Dimmable Interior LED Tri-CCT Vanity Wall Lights IP44

- Input voltage: 220-240V 50Hz
- Housing: Aluminium
- Mounting plate: iron
- Diffuser: Acrylic
- Tri-CCT (3000K / 4000K / 5700K) in one fitting
- LED chips: SMD2835
- CRI: 80
- Power factor: 0.92
- Ambient temp: -20 to 50°C
- Suitable for dimming
- Suitable for 2 way switching
- Suitable for use with sensors



**LINEAL1**  
(White)



**LINEAL2**  
(Black)



**LINEAL3**  
(Chrome)


**Each colour has 3 sizes**

### For Tested and Recommended Dimmers:


- CLA-Trailing Edge: LYNX; VELA
- Clipsal-Universal: 32E450UDM, 31E2PUDM
- Clipsal-Trailing Edge: 32ELEDM-WE; 32E450TM
- HPM-Trailing Edge: CAT250T, CAT400T
- Diginet-LED Smart: MEDM, MMDM/RT

\*Please check with Licenced electrician for Min and Max dimmer load


\*May be compatible with other untested dimmers

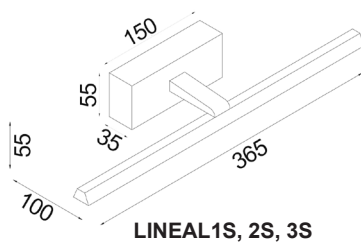

**LINEAL1S, 2S, 3S**

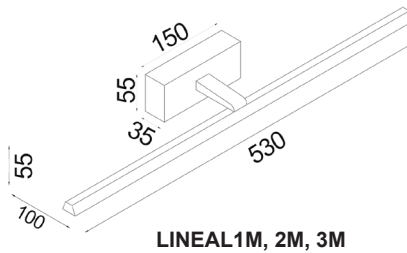

**LINEAL1M, 2M, 3M**

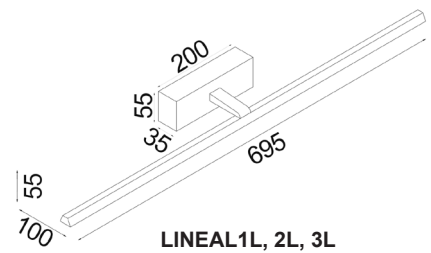

**LINEAL1L, 2L, 3L**

PART NO.	COLOUR	LUMENS			WATT	LENGTH	BASE	BOX SIZE	BOX WEIGHT	CARTON QTY
		3000K	4000K	5700K						
LINEAL1S	Powder coated White	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL1M	Powder coated White	1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL1L	Powder coated White	1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10
LINEAL2S	Powder coated Black	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL2M	Powder coated Black	1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL2L	Powder coated Black	1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10
LINEAL3S	Electroplated Chrome	740LM	762LM	652LM	8W	365mm	150x55mm	12x6x40cm	0.65kg	1/10
LINEAL3M	Electroplated Chrome	1090LM	1150LM	1000LM	12W	530mm	150x55mm	12x6x56cm	0.72kg	1/10
LINEAL3L	Electroplated Chrome	1320LM	1531LM	1305LM	16W	695mm	200x55mm	12x6x75cm	0.9kg	1/10

\*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)