
## Telbix.

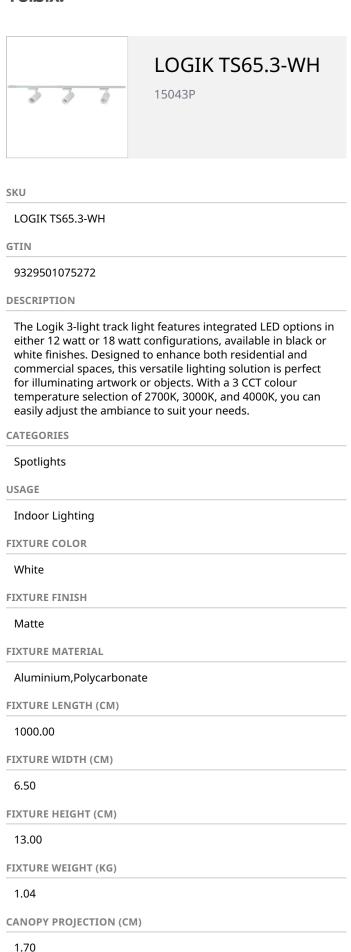

CANOPY LENGTH (CM)
1000.00
VOLTAGE INPUT
240V
TOTAL WATTAGE (MAX)
54
WATTAGE
18
GLOBE TYPE
LED integrated COB
GLOBE / LIGHT SOURCE QTY
3
GLOBE / LIGHT SOURCE INCLUDED
Yes
LUMENS
1600
COLOR TEMPERATURE
Warm White; Warm White; Natural White
COLOR KELVIN
3 CCT (2700k - 3000k - 4000k)
3 CCT (2700k - 3000k - 4000k)
3 CCT (2700k - 3000k - 4000k)  DIMMABLE
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)  IP RATING
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)  IP RATING  IP20
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)  IP RATING  IP20  LEAD AND PLUG
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)  IP RATING  IP20  LEAD AND PLUG  No
3 CCT (2700k - 3000k - 4000k)  DIMMABLE  Yes - TRIAC  BEAM ANGLE  24  ELECTRICAL PROTECTION  CLASS I - HIGH VOLTAGE, EARTH REQUIRED  SURGE PROTECTION  Yes (1.5 Kva)  IP RATING  IP20  LEAD AND PLUG  No  APPROVALS

CANOPY WIDTH (CM)

3.50

## теlbіх.

8.60

CARE INSTRUCTIONS
Do not use strong liquid cleaners,Wipe clean with a dry cloth
REPLACEMENT WARRANTY
*3 Years
MODEL NO.
LOGIK TS65.3
BOX WEIGHT (KG)
1.45
BOX LENGTH (CM)
99.00
BOX WIDTH (CM)
13.50
BOX HEIGHT (CM)
70.00
MASTER CARTON LENGTH (CM)
100.50
MASTER CARTON WIDTH (CM)
23.00
MASTER CARTON HEIGHT (CM)
29.50
MASTER CARTON WEIGHT (KG)