
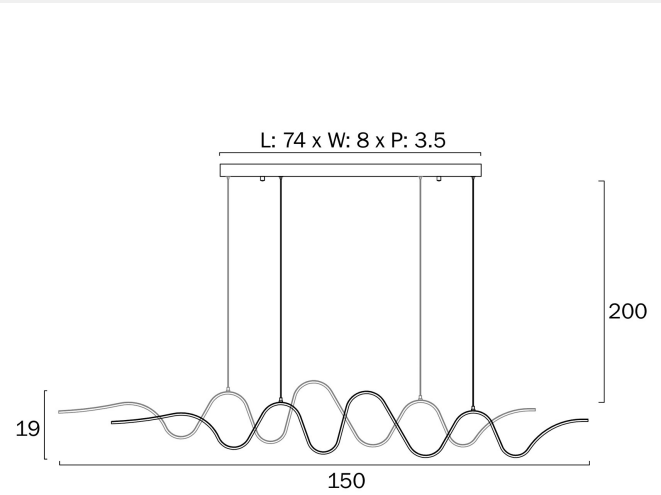


OSELIA LINEAR PENDANT LIGHT

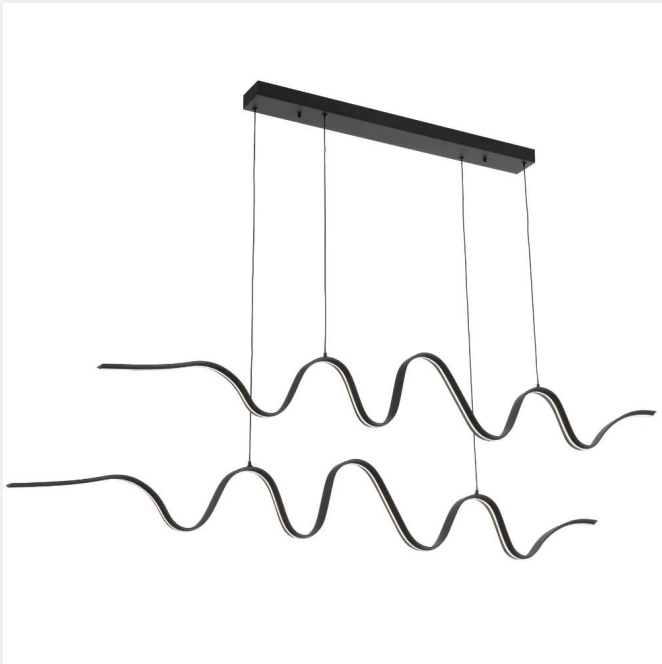

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

- Voltage Input240
- Total Wattage (max)46
- Globe TypeLED integrated SMD
- Globe / Light Source qty0
- Globe / Light Source includedYes
- Color Kelvin3000k
- Color TemperatureWarm White
- DimmableNo
- Lumens2560
- CRI (Color Rendering Index)>90

Surge Protection (Yes/No)
0

SPECIFICATIONS

- Lead and PlugNo
- IP ratingIP20
- Suspension TypeCable
- Raked Ceiling Compatible0
- Electrical ProtectionCLASS I - HIGH VOLTAGE, EARTH REQUIRED
- Beam Angle (degree)0

COLOUR AND MATERIAL

- Fixture MaterialAluminium, Silicon, Iron
- Canopy ColorBlack or White

Glass Color

0

Diffuser Material

0

[OSELIA PE-WH] OSELIA
LINEAR PENDANT LIGHT
(WHITE)



9329501084571

WARRANTY

Replacement Warranty

*3 Years

PRODUCT DIMENSIONS

Fixture Weight (Kg)

2.45

Fixture Height (cm)

19

Fixture Width (cm)

0

Suspension Length (cm)

200

Canopy Projection (cm)

3.5

OTHER

Additional Functions

0

CARE

Care Instructions

Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[OSELIA PE-BK] OSELIA
LINEAR PENDANT LIGHT
(BLACK)



9329501084564

Find OSELIA LINEAR PENDANT LIGHT on
www.telbix.com

