
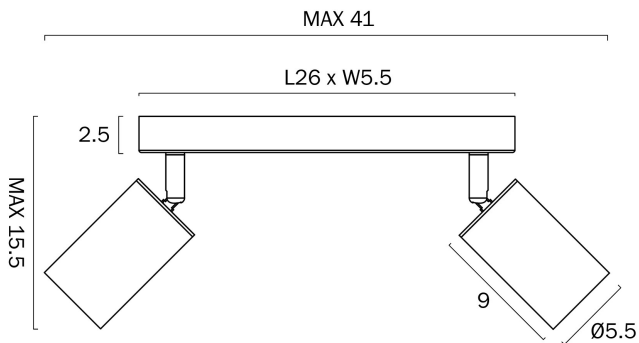


PICARD 2 LIGHT CEILING SPOTLIGHT

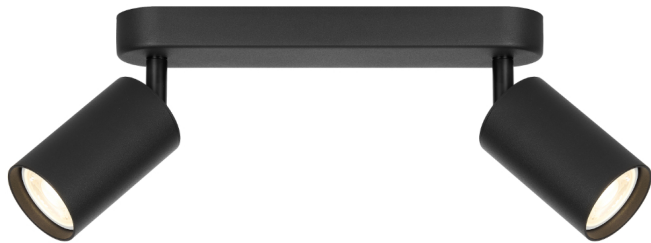

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

Voltage Input
240V

Total Wattage (max)
14

Globe Type
GU10

Globe / Light Source qty
2

Globe / Light Source included
Yes

Color Kelvin
3 CCT (3000k – 4000k – 5000k)

Color Temperature
Warm White; Natural White; Cool White

Dimmable
No

CRI (Color Rendering Index)
>90

SPECIFICATIONS

Lead and Plug
No

IP rating
IP20

Electrical Protection
CLASS I – HIGH VOLTAGE, EARTH REQUIRED

COLOUR AND MATERIAL

Fixture Material
Aluminium,Iron

PRODUCT DIMENSIONS

Fixture Weight (Kg)
0.7

Fixture Width (cm)
5.5

Canopy Projection (cm)
2.5

WARRANTY

Replacement Warranty
*3 Years

CARE

Care Instructions
Do not use strong liquid cleaners, Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.,

VARIANTS

[PICARD SP2-BK] PICARD 2 LIGHT CEILING SPOTLIGHT (BLACK)	 9329501075784
[PICARD SP2-WH] PICARD 2 LIGHT CEILING SPOTLIGHT (WHITE)	 9329501075791

Find PICARD 2 LIGHT CEILING SPOTLIGHT on
www.telbix.com

