


PICARD 3 LIGHT CEILING SPOTLIGHT

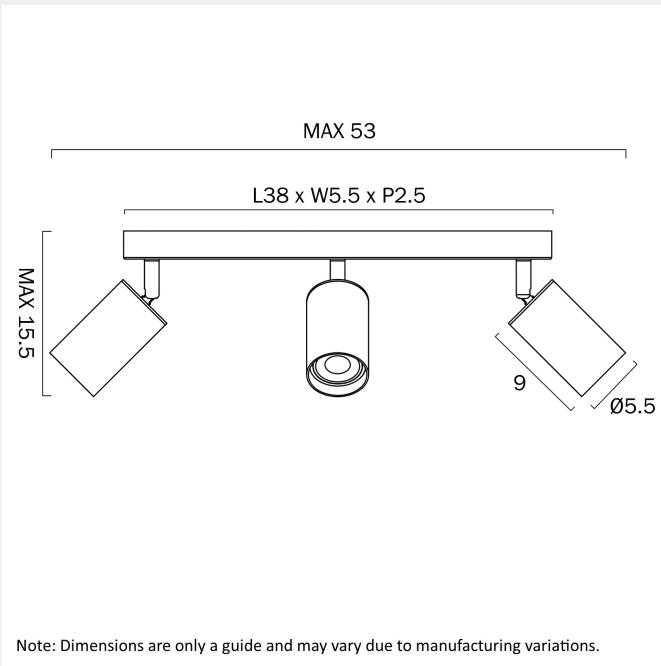

LIGHT SOURCE

- Voltage Input**
240V
- Total Wattage (max)**
21
- Globe Type**
GU10
- Globe / Light Source qty**
3
- Globe / Light Source included**
Yes
- Color Kelvin**
3 CCT (3000k – 4000k – 5000k)
- Color Temperature**
Warm White; Natural White; Cool White
- Dimmable**
No
- CRI (Color Rendering Index)**
>90

SPECIFICATIONS

- Lead and Plug**
No
- IP rating**
IP20
- Electrical Protection**
CLASS I – HIGH VOLTAGE, EARTH REQUIRED

COLOUR AND MATERIAL

- Fixture Material**
Aluminium,Iron

PRODUCT DIMENSIONS

- Fixture Weight (Kg)**
1
- Fixture Width (cm)**
5.5
- Canopy Projection (cm)**
2.5

WARRANTY

Replacement Warranty
*3 Years

CARE

Care Instructions
Do not use strong liquid cleaners, Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.,

VARIANTS

[PICARD SP3-BK] PICARD 3 LIGHT CEILING SPOTLIGHT (BLACK)	 9329501075807
[PICARD SP3-WH] PICARD 3 LIGHT CEILING SPOTLIGHT (WHITE)	 9329501075814

Find PICARD 3 LIGHT CEILING SPOTLIGHT on
www.telbix.com

