


SEATTLE

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: see table below
- Driver input current: see table below
- Driver output current: see table below
- Power factor: 0.5
- Material: iron & aluminium powder coated chrome & acrylic
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors


30,000hr Lifetime	120° Beam Angle	IP20 Rated	2 YEAR Replacement Warranty
-------------------	-----------------	----------------------	---------------------------------------






SEATTLE1 Back Plate
Depth: 35mm



SEATTLE2 Back Plate
Depth: 25mm



SEATTLE3 Back Plate
Depth: 25mm

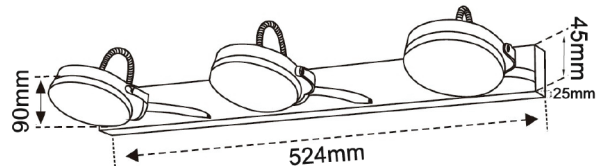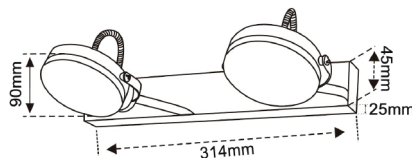

PART NO.	DRIVER OUTPUT VOLTAGE	DRIVER INPUT CURRENT	DRIVER OUTPUT CURRENT	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
SEATTLE1	2.8-12V	0.1A	0.35A	3000	283	91	3	3pcs 5050	≥80	1.00	18x15x7	12
SEATTLE2	12-18V	0.11A	0.35A	3000	563	90	2x3	6pcs 5050	≥80	1.00	35x15x7.5	12
SEATTLE3	17-26V	0.13A	0.35A	3000	840	86	3x3	9pcs 5050	≥80	1.58	53x15x7.5	12

Brochure updated on 11.05.2018

