





SHU SERIES

Exterior LED Wall Light & Bollard Lights

- Exterior LED surface mounted wall & bollard lights
- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt driver output range: 18-42V
- Housing: powder coated aluminium
- Mounting bracket: aluminium
- LED chip: 2pcs 5050
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- Bollard lights can not be used inground
- For bollard lights, to maintain the IP rating please use circular cable in junction
- For bollard lights, for parallel and single connection we recommend using an appropriate IP68 connector (CLA Connector: CONN001 & CONN002)



SHU1
(Wall Light)

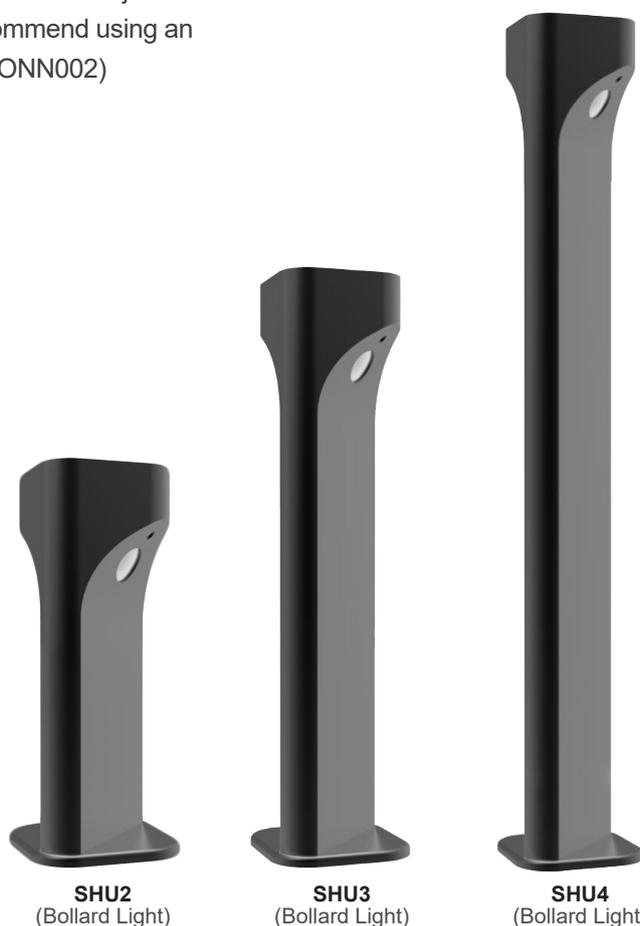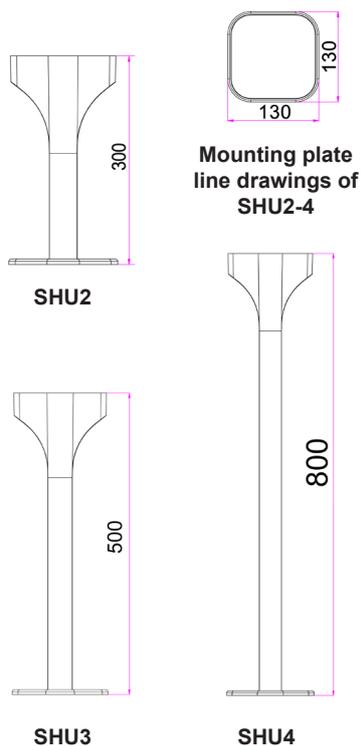

SHU2
(Bollard Light)

SHU3
(Bollard Light)

SHU4
(Bollard Light)

Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
SHU1	WALL LED S/M Dark Grey 2 way	3000K	540lm	11W	>0.5	80	125x125x200mm		1/8
SHU2	BOLLARD LED Dark Grey 2 way	3000K	540lm	11W	>0.5	80	H 300mm	130x130mm	1/8
SHU3	BOLLARD LED Dark Grey 2 way	3000K	540lm	11W	>0.5	80	H 500mm	130x130mm	1/4
SHU4	BOLLARD LED Dark Grey 2 way	3000K	540lm	11W	>0.5	80	H 800mm	130x130mm	1/4

*These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking

*To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)