


12V MR16 EXTERIOR SPIKE LIGHTS



PRODUCT FEATURES


- Input voltage: 12-25V AC/DC
- Material: aluminium, copper, 316 stainless steel
- Lamp holder: MR16 (Max.20W halogen globe)
- Globes not included
- Cable included (L 2000mm)
- External control gear required



IP65
Rated


2YEAR
Replacement
Warranty

90° Tilt/ 270° Swivel

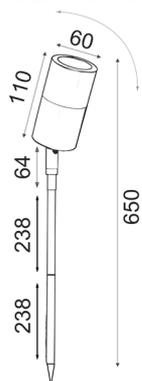

SPMSBL
SPMSC
SPMSSS
SPMST

90° Tilt/ 270° Swivel

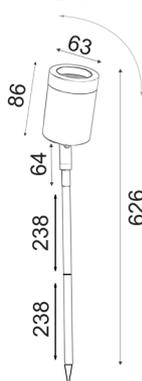

SPMSBL86
SPMSSS86



SPMSBL



SPMSC



SPMSSS



SPMST



SPMSBR1



SPMSBR2



SPMSBL86



SPMSSS86

PART NO.	DESCRIPTION	COLOUR	QTY OF GLOBES	WEIGHT (KG)	BOX (CM)	CARTON QTY
SPMSBL	SPIKE MR16 L550mm Aluminium BLK	POWDER COATED BLK	1xMR16	0.55	26 x 7 x 7	1/20
SPMSC	SPIKE MR16 L550mm COP	COPPER	1xMR16	1.15	26 x 7 x 7	1/10
SPMSSS	SPIKE MR16 L550mm SS316	316 STAINLESS STEEL	1xMR16	1.10	26 x 7 x 7	1/10
SPMST	SPIKE MR16 L550mm Titanium	TITANIUM	1xMR16	0.55	26 x 7 x 7	1/20
SPMSBR1	(NEW) SPIKE MR16 L550mm Aged Brass	AGED BRASS	1xMR16	1.1	26 x 7 x 7	1/20
SPMSBR2	(NEW) SPIKE MR16 L550mm Solid Brass	POLISHED BRASS	1xMR16	1.1	26 x 7 x 7	1/20
SPMSBL86	SPIKE MR16 L550mm (L86mm Barrell) Alum BLK	POWDER COATED BLK	1xMR16	0.7	26 x 7 x 7	1/20
SPMSSS86	SPIKE MR16 L550mm (L86mm Barrell) SS316	316 STAINLESS STEEL	1xMR16	1.16	26 x 7 x 7	1/10

* Rod sections can be used as 1 or 2 pieces (to shorten)