

12V MR16 EXTERIOR SPIKE LIGHTS




PRODUCT FEATURES

- Input voltage: 12-25V AC/DC
- Material: aluminium, copper, 316 stainless steel & brass
- Lamp holder: MR16 (Max.20W globe)
- Globes not included
- Cable included (L 2000mm)
- External control gear required



IP65
Rated

2YEAR
Replacement
Warranty

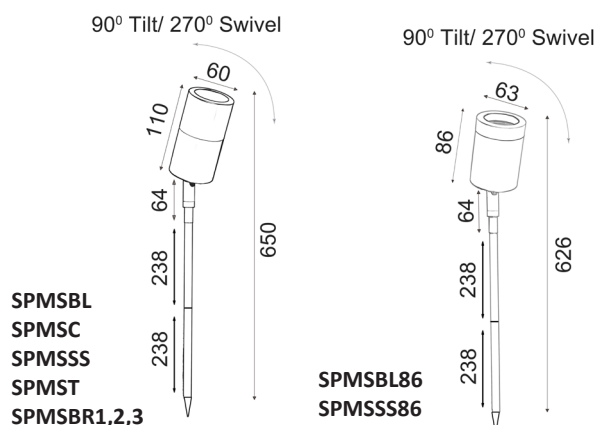

SPMSBL86



SPMSSS86



SPMSBL



SPMSC



SPMSSS



SPMST



SPMSBR1



SPMSBR2



SPMSBR3

| PART NO. | DESCRIPTION | COLOUR | QTY OF GLOBES | WEIGHT (KG) | BOX (CM) | CARTON QTY |
|----------|--|---------------------|---------------|-------------|------------|------------|
| SPMSBL | SPIKE MR16 L550mm Aluminium BLK | POWDER COATED BLK | 1xMR16 | 0.55 | 26 x 7 x 7 | 1/20 |
| SPMSC | SPIKE MR16 L550mm COP | COPPER | 1xMR16 | 1.15 | 26 x 7 x 7 | 1/10 |
| SPMSSS | SPIKE MR16 L550mm SS316 | 316 STAINLESS STEEL | 1xMR16 | 1.10 | 26 x 7 x 7 | 1/10 |
| SPMST | SPIKE MR16 L550mm Titanium | TITANIUM | 1xMR16 | 0.55 | 26 x 7 x 7 | 1/20 |
| SPMSBR1 | (NEW) SPIKE MR16 Aged Brass | AGED BRASS | 1xMR16 | 1.1 | 26 x 7 x 7 | 1/10 |
| SPMSBR2 | (NEW) SPIKE MR16 Solid Brass | POLISHED BRASS | 1xMR16 | 1.1 | 26 x 7 x 7 | 1/10 |
| SPMSBR3 | (NEW) SPIKE MR16 Green Patina Solid Brass | GREEN PATINA | 1xMR16 | 1.1 | 26 x 7 x 7 | 1/10 |
| SPMSBL86 | SPIKE MR16 L550mm (L86mm Barrell) Alum BLK | POWDER COATED BLK | 1xMR16 | 0.7 | 26 x 7 x 7 | 1/20 |
| SPMSSS86 | SPIKE MR16 L550mm (L86mm Barrell) SS316 | 316 STAINLESS STEEL | 1xMR16 | 1.16 | 26 x 7 x 7 | 1/10 |

* Rod sections can be used as 1 or 2 pieces (to shorten)