

TABLET SERIES - LED SLIM FLOOD LIGHTS



▲ TABLET1,2B,7A,9A


Product Features

- Input voltage range: 100-265V AC (TABLET4A: 175-265V)
- Housing: die casted aluminium
- Bracket: iron
- LED chips: SMD2835 (TABLET9A: 3030)
- TABLET1: 500mm flex; TABLET2B, 4A,7A & 9A: 1200mm flex & plug
- Ambient temp: -20 to 40°C;
- Suitable for 2-way switching
- Suitable for PIR or Microwave sensors

25,000hr Lifetime	CRI80	IP65 Rated	2YEAR Replacement Warranty
-------------------	--------------	-------------------	-----------------------------------




▲ TABLET4A

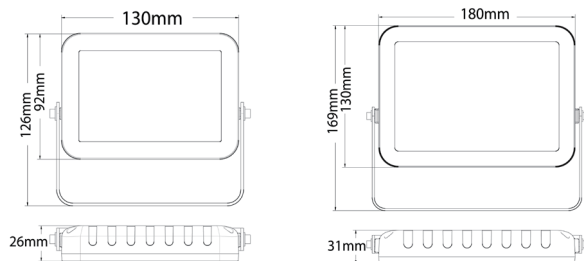

▲ TABLET1

▲ TABLET2B,4A

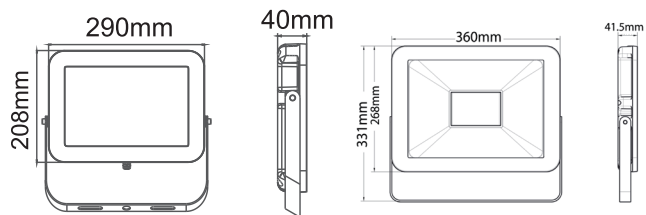

▲ TABLET7A

▲ TABLET9A

Technical Data

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	BEAM (°)	WIDTH (mm)	DEPTH (mm)	WEIGHT (KG)	BOX (CM)	CARTON QTY
TABLET1	FLOOD LED MATT BLK SLIM 5000K	5000	700	10	120°	130	26	0.63	17x14.9x4	1/20
TABLET2B	FLOOD LED MATT BLK SLIM 5000K	5000	2400	30	110°	180	31	1.00	23x19x5	1/16
TABLET4A	FLOOD LED MATTE WH SLIM 5000K	5000	1600	20	110°	180	31	1.00	22x19x5	1/16
TABLET7A	FLOOD LED MATT BLK SLIM 5000K	5000	4000	50	110°	290	40	2.50	36x28x5	1/5
TABLET9A	FLOOD LED MATT BLK SLIM 5000K	5000	8000	100	110°	360	41.5	4.10	42x35x6	1/4